


Racores rectos

Rosca macho:
Rosca GAS para tubos,
cilíndrica

Estanqueidad por arista
de junta

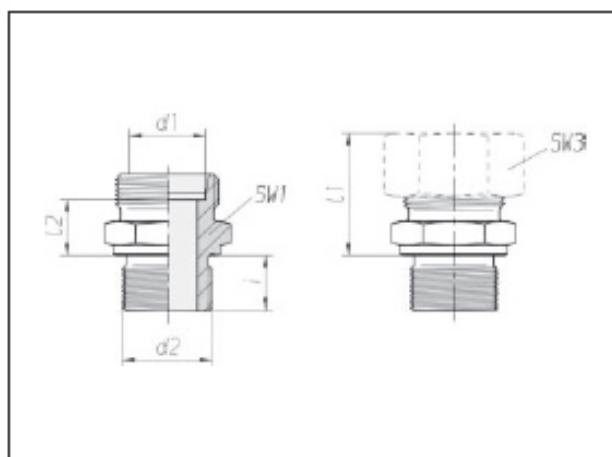

3

Serie Tubo-ØEx d1	Presión	d2	SW1	SW3	L1 aprox.	L2	i	Nm -10 %	kg/100 aprox.	Referencia Pieza individual	Referencia *
S 25	PB 250	G 1 1/4 A	50	46	47	23	20	580	44,0	0 7 10 87 20 00	0 1 10 87 20 07
S 30	PB 250	G 3/4 A	46	50	50	23,5	16	280	29,9	0 7 10 93 20 00	0 1 10 93 20 07
S 30	PB 250	G 1 A	46	50	50	23,5	18	440	32,8	0 7 10 91 20 00	0 1 10 91 20 07
S 30	PB 250	G 1 1/4 A	50	50	50	23,5	20	580	41,7	0 7 10 90 20 00	0 1 10 90 20 07
S 38	PB 250	G 1 A	55	60	57	26	18	440	49,2	0 7 10 98 20 00	0 1 10 98 20 07
S 38	PB 250	G 1 1/4 A	55	60	57	26	20	580	55,0	0 7 10 96 20 00	0 1 10 96 20 07
S 38	PB 250	G 1 1/2 A	55	60	57	26	22	700	56,6	0 7 10 95 20 00	0 1 10 95 20 07

Estanqueidad por superficie de junta
Referencia 0710 ... en 0708...
Referencia 0110 ... en 0108...

* con tuerca para racor y 2S anillo
cortante